

• Double Action Gasoline Engine Pump

Model : HPG-700MX

Features :

- Used for wired remote control
- Large oil capacity, suitable for large capacity crimping tools and longtime operation without engine overheating
- High and low double-speed automatic switch, well fit for single and double action tools such as 60t, 100t, 200t and 300t
- Retract pressure protection system & overflow protection valve, safe and reliable
- Low noise, environment friendly
- Equipped with pressure gauge for pressure reading



Specifications :

✓ Model	: HPG-700MX	✓ Oil Delivery Pressure (Low)	: 7.5 L/min
✓ Reservoir capacity	: 10 Litre	✓ Engine Speed	: 3600 rpm
✓ Rated Output Pressure	: 700 bar	✓ Weight	: 53kg (include oil)
✓ Oil Delivery Pressure (High)	: 1,2 L/min	✓ Hydraulic Hose	: 8 metre
		✓ Insulated Hydraulic Hose	: 15 metre

• Insulated Hydraulic Hose

Specifications :

Hoses meet standards SAE J517/J343 and EN855 for non conductivity where maximum electrical leakage shall not exceed 50µA when a 152 mm sample is subject to 37.5 KV for 5 minutes equivalent to 250 KV/meter.




Hydraulic Compression Head

Model : PCS-100

Features :

- Crimp overhead line ACSR, strain clamps for 110kV and underground cable sleeves for 220kV
- Double action hydraulic cylinder makes piston reset in short time
- Double action Hydraulic cylinder can avoid slow retraction by spring
- Quick coupler for easy disassembly
- Power by double action hydraulic pump

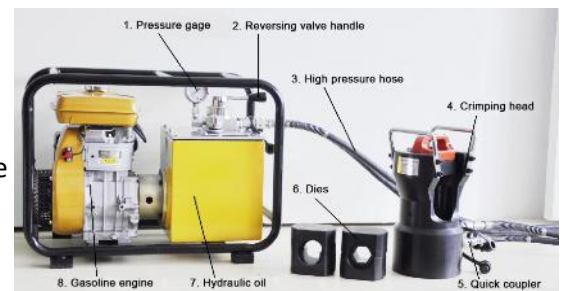

Specifications :

✓ Model	: PCS-100
✓ Crimp Force	: 100 Ton
✓ Rated Pressure	: 700 bar
✓ Crimping capacity (Max)	: Cu / Al Ø 76 mm, Steel Ø 36 mm
✓ Cylinder Type	: Double action
✓ Weight	: 31 kg

